


Technical Specification

Duty	Pitch P	Chain Options	Crossrod Diameter D	Maximum Sideplate height	Sideplate thickness
Light Duty 16 swg 1.63mm thick slats	1.5" 38.1mm	3,000 lb or 4,500 lb	0.25" 6.35mm	1.5" 38.1mm	16 swg 1.63mm
	2.0" 50.8mm			2.0" 50.8mm	
	3.0" 76.2mm			3.0" 76.2mm	
Medium Duty 11 swg 3.0mm thick slats	2.0" 50.8mm	3,000 lb or 6,000 lb	0.375" 9.53mm	2.0" 50.8mm	11 swg 3.0mm
	3.0" 76.2mm			3.0" 76.2mm	
	4.0" 101.6mm			4.0" 101.6mm	
	6.0" 152.4mm			6.0" 152.4mm	

- All belts can be supplied with a large variety of sideplates and baffles.
- A large range of sprockets are available.

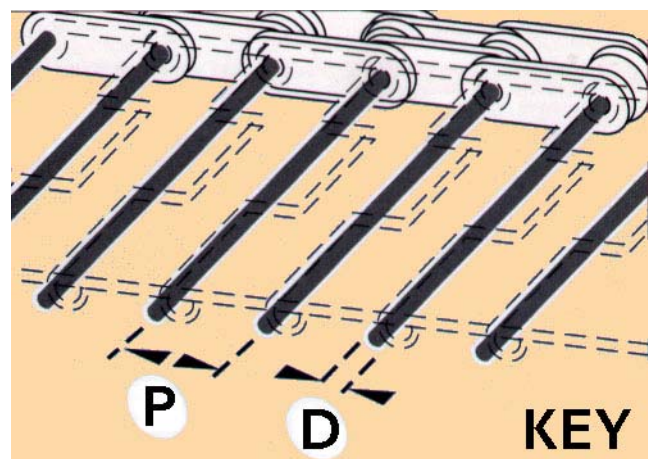

George Lane & Sons Ltd

Bannerley Road, Garretts Green, Birmingham B33 0SL, England.

Tel: +44 (0)121 784 5525 Fax: +44 (0)121 783 6988 e-mail: info@georgelane.co.uk www.georgelane.co.uk

Lane
wire belts



Plate Link Belting

