

CROSS CONVEYOR (TRANSFER BELTS)

Transfer Belts are available in either the 60-48/16-16 BS or 36-85/16-16 CW4 patterns illustrated, and manufactured to a nominal 0.25" thickness (6.35mm).

Usually both patterns are made in Carbon Steel, although 3% Chrome Molybdenum or Stainless Steel can be supplied upon request.



| STANDARD WIDTHS | 4.875" | 123.8 mm. |
|-----------------|--------|-----------|
| | 5.875" | 149.2 mm. |
| | 7.875" | 200.0 mm. |

No 36-85/16-16 CW4 Cordweave

| | | |
|-------------------|---|------------------------|
| Pitch of Spiral | : | 8.5mm |
| Spiral Wire | : | 1.60mm Ø |
| Crossrod Spacing | : | 3.6mm |
| Crossrod Wire | : | 1.60mm Ø |
| Weight of Belting | : | 22.0 kg/m ² |
| Mesh Thickness | : | 6.35mm (1/4") |

No 60-48/16-16 Balanced Spiral

| | | |
|-------------------|---|------------------------|
| Pitch of Spiral | : | 5.1mm |
| Spiral Wire | : | 1.60mm Ø |
| Crossrod Spacing | : | 6.35mm |
| Crossrod Wire | : | 1.60mm Ø |
| Weight of Belting | : | 14.2 kg/m ² |
| Mesh Thickness | : | 6.35mm (1/4") |

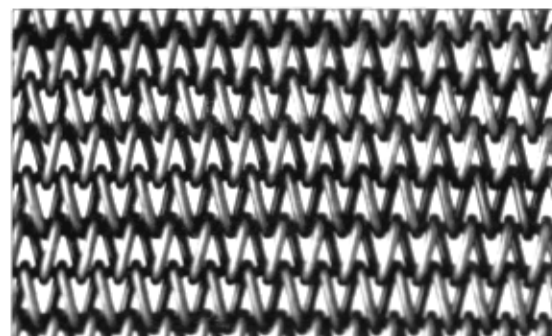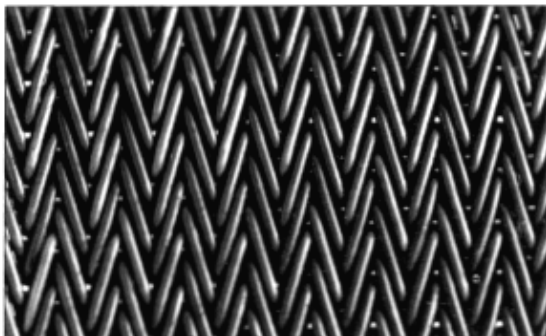

Belt patterns shown actual size

George Lane & Sons Ltd

Bannerley Road, Garretts Green, Birmingham B33 0SL, England.

Tel: +44 (0)121 784 5525 Fax: +44 (0)121 783 6988 e-mail: info@georgelane.co.uk www.georgelane.co.uk